


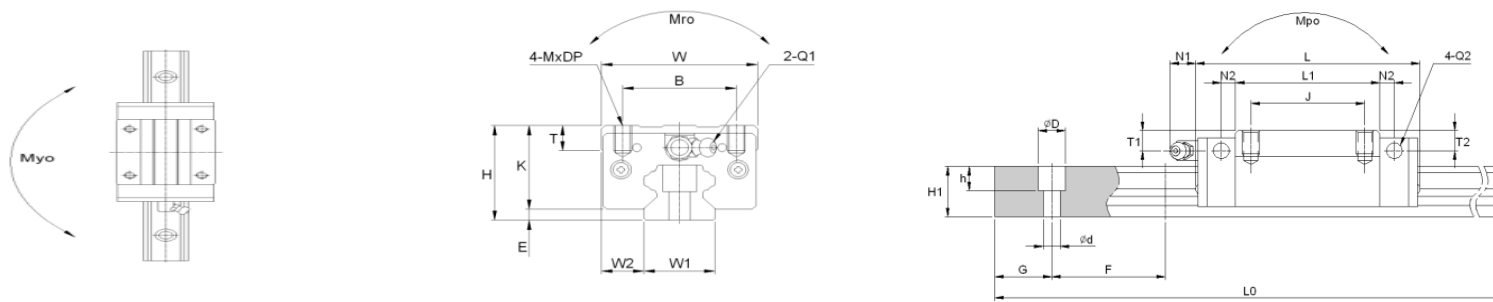

SBI与SBG (15~45) – SL / SLL Type

型号Model	安装尺寸Mounting dimension				滑块的尺寸 Block dimensions														滑轨的尺寸 Rail dimensions										额定负载		静态扭矩			质量	
	H	W	L	E	安装孔尺寸 mounting tap hole				L1	T	K	注油嘴 Grease fitting							W1	W2	H1	F	安装孔尺寸 Bolt fitting			G	滑轨的 最大长度 L0	Rating load rating (KN)		Permissible static moment (KN.M)			滑块 block (kg)	滑轨 Rail (kg)	
					B	J	M	DP				T1	N1	T2	N2	Q1	Q2	d					D	h	C			C0	Mro	Mpo	Myo				
SBG15SL	28	34	60.8	3	26	26	M4	5	38.8	8	25	8	5.5	8.5	4.5	M4*0.7	4	15	9.5	15	60	4.5	7.5	5.3	20	3000	8.33	13.4	0.07	0.05	0.05	0.2	1.45		
SBI15SL	28	34	63.8	3	26	26	M4	5	45.2	10	25	8.5	5.5	7.8	3.4	M4*0.7	4	15	9.5	13	60	4.5	7.5	5.5	20	3000	14.1	24.1	0.16	0.17	0.17	0.19	0.13		
SBI15SLL	28	34	79.4	3	26	34	M4	5	60.8	10	25	8.5	5.5	7.8	3.4	M4*0.7	4	15	9.5	13	60	4.5	7.5	5.5	20	4000	17.1	31.7	0.21	0.29	0.29	0.26	1.3		
SBG20SL	30	44	77.2	3.5	32	36	M5	8	50.8	8	26.5	7	11.7	7	5	M6*0.75	6	20	12	17.5	60	6	9.5	8.5	20	4000	14.2	25	0.22	0.18	0.18	0.33	0.22		
SBI20SL	30	44	78.8	4.6	32	36	M5	8	56.8	9.8	25.4	6	11.7	5.8	5	M6*0.75	4	20	12	16.5	60	6	9.5	8.5	20	4000	22.2	38.2	0.36	0.33	0.33	0.41	2.2		
SBG20SLL	30	44	93.2	3.5	32	50	M5	8	66.8	8	26.5	7	11.7	7	5	M6*0.75	6	20	12	17.5	60	6	9.5	8.5	20	4000	16.9	36.5	0.28	0.31	0.31	0.45	2.2		
SBI20SLL	30	44	96.4	4.6	32	50	M5	8	74.4	9.8	25.4	6	11.7	5.8	5	M6*0.75	4	20	12	16.5	60	6	9.5	8.5	20	4000	27.9	50	0.47	0.56	0.56	0.54	2.2		
SBG25SL	40	48	86.9	6.5	35	35	M6	8	59.5	12	33.5	12.2	11.7	12.1	5.5	M6*0.75	6	23	12.5	21.8	60	7	11	9	20	4000	20.9	39.2	0.35	0.31	0.3	0.56	3.1		
SBI25SL	40	48	92	5.5	35	35	M6	8	70	16	34.5	10	11.7	9.6	5	M6*0.75	4	23	12.5	20	60	7	11	9	20	4000	31.5	52.1	0.56	0.56	0.56	0.69	3		
SBG25SLL	40	48	106.4	6.5	35	50	M6	8	79	12	33.5	12.2	11.7	12.1	5.5	M6*0.75	6	23	12.5	21.8	60	7	11	9	20	4000	24.6	48	0.43	0.49	0.48	0.73	3.1		
SBI25SLL	40	48	108	5.5	35	50	M6	8	86	16	34.5	10	11.7	9.6	5	M6*0.75	4	23	12.5	20	60	7	11	9	20	4000	36.7	64.4	0.69	0.84	0.84	0.85	3		
SBG30SL	45	60	99	7	40	40	M8	10	70.4	12	38	11.5	11.7	11.5	5.5	M6*0.75	6	28	16	25	80	9	14	12	20	4000	29.2	53.8	0.59	0.49	0.48	0.98	4.45		
SBI30SL	45	60	107.6	7	40	40	M8	10	79.6	12	38	11.5	11.7	10.8	5	M6*0.75	6	28	16	23	80	9	14	12	20	4000	42.8	65.4	0.85	0.77	0.77	1.04	4.25		
SBG30SLL	45	60	121.5	7	40	60	M8	10	92.9	12	38	11.5	11.7	11.5	5.5	M6*0.75	6	28	16	25	80	9	14	12	20	4000	35.3	67.9	0.74	0.79	0.78	1.28	4.45		
SBI30SLL	45	60	131.6	7	40	60	M8	10	104	12	38	11.5	11.7	10.8	5	M6*0.75	6	28	16	23	80	9	14	12	20	4000	51.3	84.7	1.1	1.3	1.3	1.37	4.25		
SBG35SL	55	70	112.6	7.5	50	50	M8	12	80.4	15	47.5	15	11.7	15	6	M6*0.75	6	34	18	29	80	9	14	12	20	4000	38.8	68.6	0.94	0.74	0.72	1.63	6.4		
SBI35SL	55	70	124.6	7.5	50	50	M8	10	94.6	15	47.5	15	11.7	15	6	M6*0.75	6	34	18	26	80	9	14	12	20	4000	59.5	89.1	1.42	1.28	1.28	1.56	6.02		
SBG35SLL	55	70	138.1	7.5	50	72	M8	12	106	15	47.5	15	11.7	15	6	M6*0.75	6	34	18	29	80	9	14	12	20	4000	46	90.4	1.24	1.3	1.28	2.12	6.4		
SBI35SLL	55	70	152.6	7.5	50	72	M8	10	123	15	47.5	15	11.7	15	6	M6*0.75	6	34	18	26	80	9	14	12	20	4000	71.3	115.3	1.83	2.12	2.12	2.04	6.02		
SBG45SL	70	86	140.4	10	60	60	M10	13	98	15	60	15	16.5	20	8	PT1/8	6	45	20.5	38	105	14	20	17	22.5	4000	61.6	110.6	1.98	1.56	1.54	2.96	11.25		
SBI45SL	70	86	148	9	60	60	M10	13	108	17	61	20.5	13.5	19.3	6.5	PT1/8	6	45	20	32	105	14	20	17	22.5	4000	79.2	116.3	2.48	1.9	1.9	2.8	9.77		
SBG45SLL	70	86	172.4	10	60	80	M10	13	130	15	60	15	16.5	20	8	PT1/8	6	45	20.5	38	105	14	20	17	22.5	4000	75.5	138.5	2.45	2.33	2.3	3.75	11.25		
SBI45SLL	70	86	180	9	60	80	M10	13	140	17	61	20.5	13.5	19.3	6.5	PT1/8	6	45	20	32	105	14	20	17	22.5	4000	94.8	150.5	3.21	3.14	3.14	3.69	9.77		